



Ajax NW

3305 Lingren Road • Hood River, OR 97031

RE: Press Release/Public Notice for Road Closure

FOR IMMEDIATE RELEASE

TRAFFIC IMPACTS: ROAD CLOSURE

8/17/26 - 8/28/26

Ajax Northwest will be conducting construction activities for the First Street Streetscape Project on Union Street between West 1st Street and East 2nd Street.

To safely complete this work, Union Street will be closed to all vehicular and pedestrian traffic within the work zone from **7:00 AM to 5:00 PM, Monday through Friday, August 17 through August 28, 2026**. The roadway will reopen outside of construction hours when safe to do so.

Motorists, pedestrians, businesses, and visitors are encouraged to follow posted detour routes and plan for additional travel time while work is underway. **Downtown access will remain available via 2nd Street. Port access will be available via Webber Street.**

Ajax Northwest appreciates the public's patience and cooperation as we complete these improvements.

Regards,

Austin Amon, Senior Project Manager

541-288-8910


Moses Schneider, Superintendent

541-978-9749

Nick Jacob, Owner

541-460-2710

Ajax Northwest

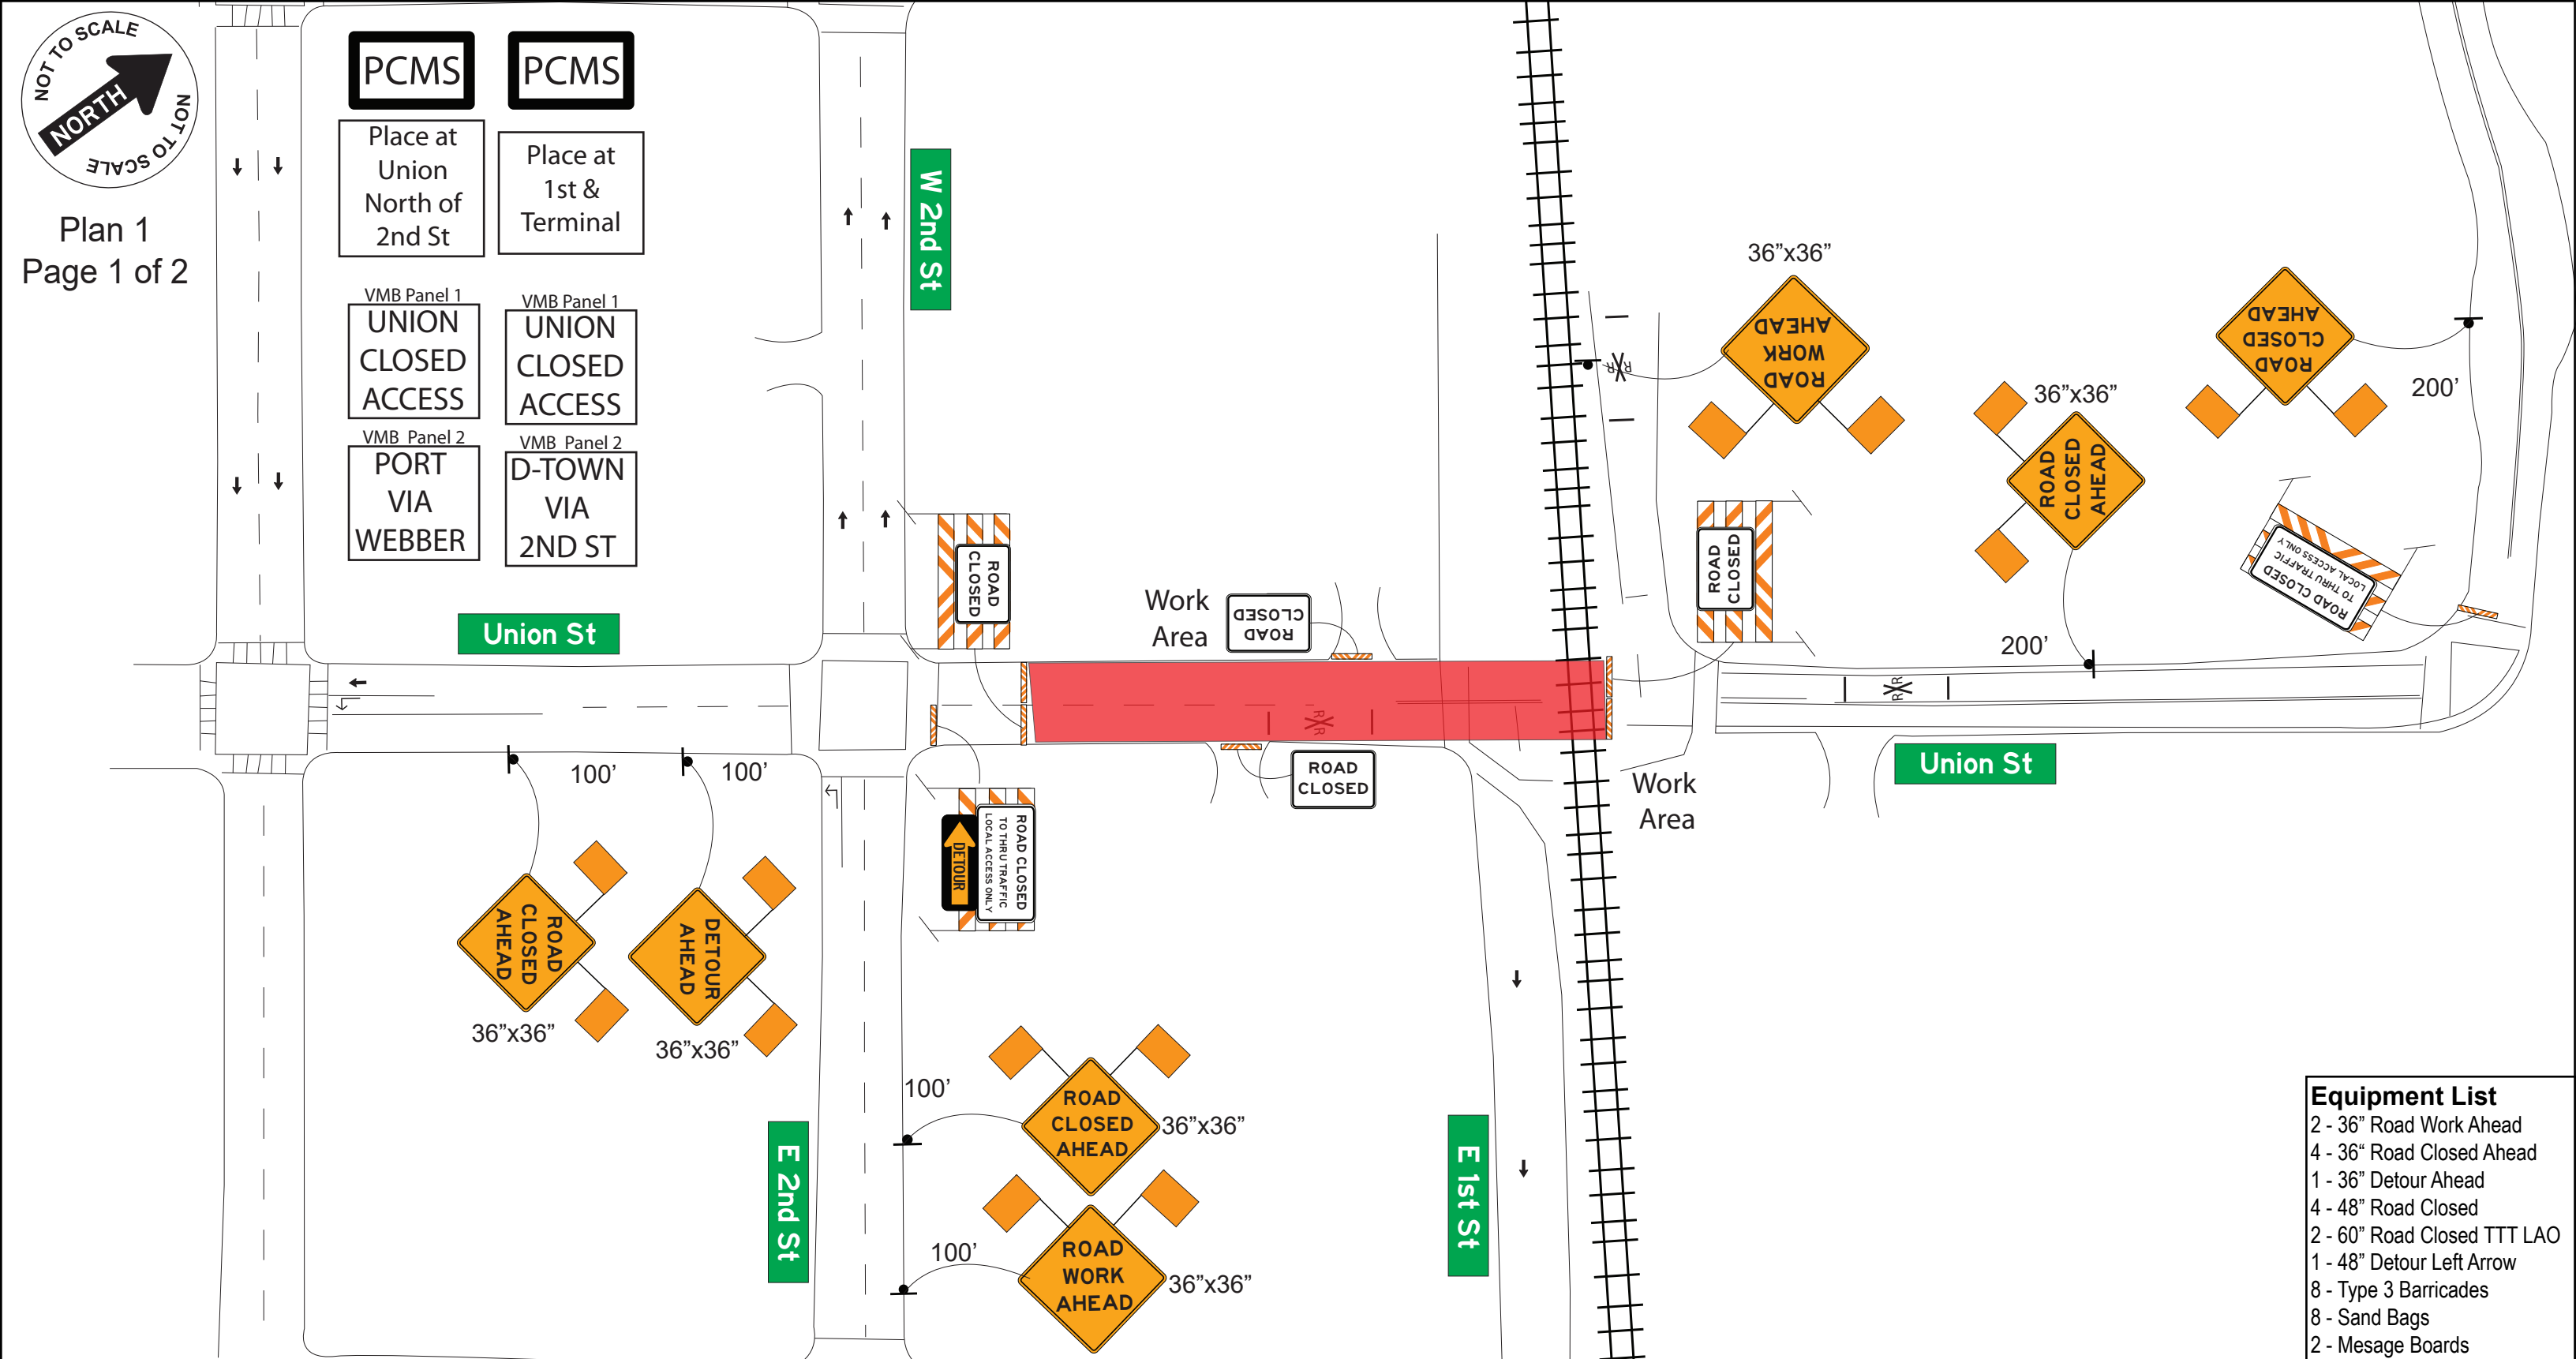

- Equipment List**
- 2 - 36" Road Work Ahead
 - 4 - 36" Road Closed Ahead
 - 1 - 36" Detour Ahead
 - 4 - 48" Road Closed
 - 2 - 60" Road Closed TTT LAO
 - 1 - 48" Detour Left Arrow
 - 8 - Type 3 Barricades
 - 8 - Sand Bags
 - 2 - Mesage Boards

TRAFFIC CONTROL PLAN MADE BY		JOB SITE INFORMATION	NOTES			KEY
Cantel Barricade Arika Engstrom arika@cantelbarricade.com 503-234-0800  DWG: Ajax-Union-1.PDF		Ajax Northwest City of The Dalled PWD Union St Road Closure 7 AM to 5 PM Plan 1 (page 1)	1) TRAFFIC CONTROL PLAN IN ACCORDANCE WITH ODOT Standard Dwg's TA-L2 Road Closure 2) SETUP TO BE ADJUSTED TO FIELD CONDITIONS AT TIME OF SETUP.	 Place in Road Non-Working hours Both Directions If Required		 Arrow Board  Programable Changable Message Sign  Channeling Devices  Type 1 Barricade Symbol  Sign Symbol (Facing Left)  Fencing  Transit - Bus Stop  Flagger  Spotter  Temporary Ramp  Truncated Dome  Pedestrian Channelizing Device  Type 3 Barricade  Work Zone  Work Vehicle



Plan 1
Page 2 of 2

- Equipment List**
2 - 24" End Detour
5 - 24" Detour Straight Arrow
3 - 24" Detour Right Arrow
2 - 24" Detour Left Arrow
11 - Type 1 Barricades

TRAFFIC CONTROL PLAN MADE BY		JOB SITE INFORMATION	NOTES		KEY
Cantel Barricade Arika Engstrom arika@cantelbarricade.com 503-234-0800  DWG: Ajax-Union-1.PDF		Ajax Northwest City of The Dalled PWD Union St Road Closure 7 AM to 5 PM Plan 1 (page 2)	1) TRAFFIC CONTROL PLAN IN ACCORDANCE WITH ODOT Standard Dwg's TA-L2 Road Closure 2) SETUP TO BE ADJUSTED TO FIELD CONDITIONS AT TIME OF SETUP.	 Place in Road Non-Working hours Both Directions If Required	 Arrow Board  Programable Changable Message Sign  Channeling Devices  Type 1 Barricade Symbol  Sign Symbol (Facing Left)  Fencing  Transit - Bus Stop  Flagger  Spotter  Temporary Ramp  Truncated Dome  Pedestrian Channelizing Device  Type 3 Barricade  Work Zone  Work Vehicle

*** NEW in 2025 STEEL PLATE Rental ***

This plan is a draft for and at the direction of the Owner/Contractor of jobsite presented. Cantel Draftman acknowledges no responsibility of any Accidents, Injury, or Deaths occuring during the using the use of this approved or unapproved plan, Reference PBOT/ODOT/MUTCD/WashDot Standard Plans, field adjust as required or directed by controlling authority.